

### Office Pro G3 Series

Line-Interactive Protection from 1000VA to 1500VA

# IDEALLY SUITED FOR:

Computers and PCs
Security Recording Devices
VOIP and Telecom
Networking Equipment





#### USB Charger port built-in

Line Interactive design

Automatic voltage regulation (AVR)

LCD provides real time status

Ten outlets (5) Surge only (5) Battery Backup outlets

**TAA Compliant** 

Surge protection via RJ45 and Coax connection

Stay informed with Free monitoring Software

Easy change user replaceable batteries


37 Month Silver Warranty for electronics and battery

Line-Interactive Protection from 1000VA to 1500VA

## **Rear View**



## **LCD Display**

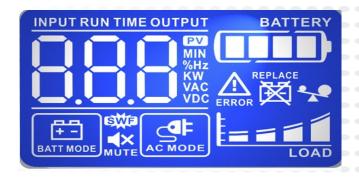

LCD display indicates input voltage, output voltage, load level, battery capacity, operation mode, and alarm conditions.

## **Easy Change Batteries**

Orion Power ups systems use high quality batteries that last 3-5 years. Once they need to be replaced, it is as easy as changing a flashlight battery.

No tools needed!





## **TAA Compliant**

Office Pro G3 series is TAA compliant meaning it is manufactured in the US or other designated country that complies with fair and ethical trade practices.

TAA compliance is a requirement for purchase by the US government.

## Office Pro G3 Series 1000VA/1500VA

### Line-Interactive Protection from 1000VA to 1500VA

#### **Specifications**

Model	OP1000U-G3	OP1500U-G3			
Capacity (VA)	1000VA	1440VA			
Capacity (Watts)	600W	900W			
Input					
Input Voltage Range	110-120VAC Nominal 81—134 VAC				
Frequency Range	50-60Hz (Auto-Sense)				
Input Cord and Plug	6 foot line cord with NEMA 5-15P				
Output					
On Battery Output Voltage	110-120V Simulated Sine Wave				
On Battery Output Frequency	50-60Hz (+/- 1Hz)				
Overload Protection	Yes				
Physical					
Total # of Receptacles	NEMA 5-15R ( 5 on Battery Backup 5 Surge Only)				
Maximum Dimensions	11.5 in x 3.88 in x 11 in.	16.25 in x 3.88 in x 11 in.			
Weight	20 lbs.	29 lbs.			
Battery					
Battery Type	Sealed Lead Acid	Sealed Lead Acid			
Battery Voltage	12 Vdc	24 Vdc			
Typical Recharge Time	8 hours to 90%	8 hours to 90%			
Warning Diagnostics	100				
LCD Indicators	AC Input, Output Voltage, Load Level, Battery Capacity, Operation Mode, and alarms				
Communication					
Communication port	HID USB				
Software Management Op- tions	Windows Vista / 7 /8 /10 / 11 included at no charge				
Environmental					
Operating Temperature	$32^{\circ}\mathrm{F}$ to $122^{\circ}\mathrm{F}$ (0 $^{\circ}\mathrm{C}$ to $50^{\circ}\mathrm{C}$ )				
Operating Relative Humidity	0 to 90% NON-CONDENSING				
Management					
Auto-Charger	Yes				
Auto-Restart	Yes				

Runtime Chart					
	Load (Watts) / T	Load (Watts) / Time in minutes			
Model	300	600	900	1200	
OP1000U-G3	8.5 m	< 2m	N/A	N/A	
OP1500U-G3	17m	4.5m	< 2 m	N/A	



Orion Power Systems manufactures ups systems from 550va to 120kVA along with power strips, surge suppression, and communication accessories. Professionals in the IT, security, and telecommunications industries count on Orion Power Systems to provide power protection that is reliable and on budget.

If you rely on clean power you can rely on Orion....

Just like these clients

